

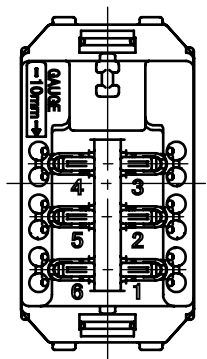


Front view when shutter is opened.

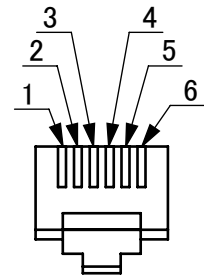

A direction side view



Pin assignment (2:1)

Dim.in mm

Applicable plug	The mating plug should be "Miniature 6-position plug" specified in TIA-1096-A (Previously in FCC part 68)
Applicable cable	3-pairs Business-phone indoor cable
	Conductors to be solid copper wire of 0.4-0.65 mm in diameter

3	Shutter	ABS resin	Molding	Cool White
2	Cover	ABS resin	Molding	Cool White
1	Body	ABS resin	Molding	Blue
Sym	Item or Code No.	Material & Size	Process	Remark

Catalog No. WEG2166

Specification Drawing

Name Full-Color Wide Series Telephone Modular Jack (6 position with 6 contacts)

Unit: mm

Remark

Rev.

1

Panasonic Corporation