
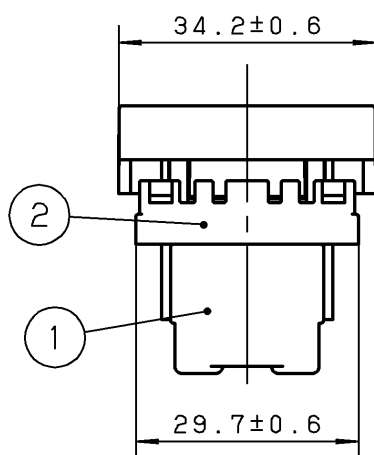
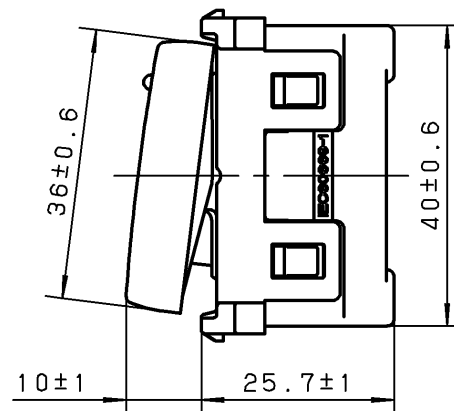


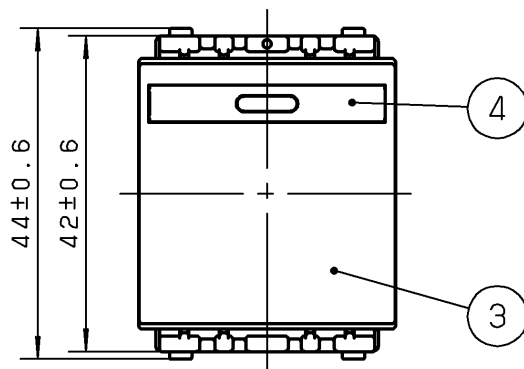

Rating	16AX 250V ~
Applicable Wire	Rigid (Solid & Stranded) Copper Conductor Type : 1.5mm ² ~4.0mm ²

4	Handle line	ABS Resin	1	Molded	Metallic Dark Brown (Coating)
3	Handle	ABS Resin	1	Molded	Metallic Bronze (Coating)
2	Cover	Polybutylene terephthalate	1	Molded	Black
1	Body	Urea Resin	1	Molded	Green
Sym	Item or Code No.	Material & Size	qt	Process	Remark

Catalog No. WEG5521MF

Specification Drawing

Name Full-Color Wide series Refina Switch* B' single pole,
Quick Connect Terminal, 2-Device (Metallic Brown) 16AX 250V ~

Unit: mm

Remark _____

Rev.

Panasonic Electric Works Co., Ltd.

Projection method : Third angle projection

(HKC0410, D01, 61, 081001)