
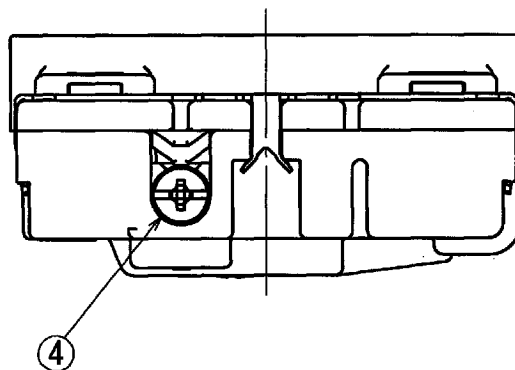
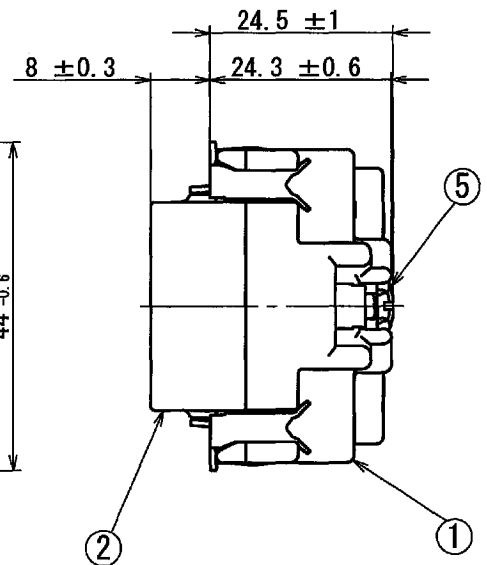


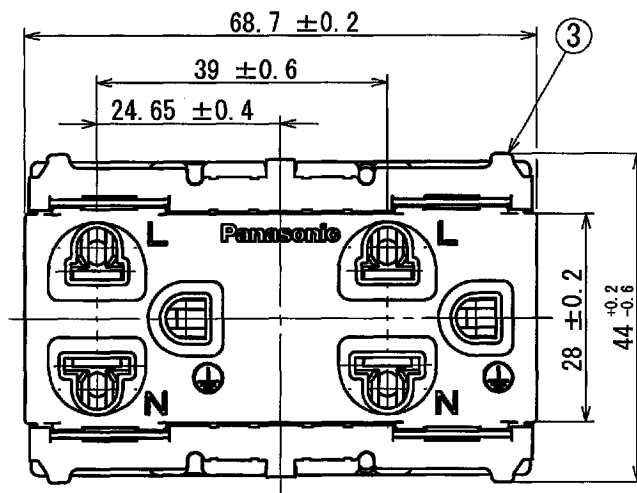

Rating	16A 250V ~		
Applicable Plugs	- Blade type : TIS.166-2535	16A 250V~ (I I : 2P)	
		16A 250V~ (I I : 2P+E)	
	: PNS1572	16A 250V~ (I I : 2P)	
		16A 250V~ (I I : 2P+E)	
	- Pin type : CEE	2.5A 250V~ (●● : 2P φ4)	
		16A 250V~ (●● : 2P φ4.8)	
Applicable Wire	Only Rigid(Solid or Stranded) Copper Conductor Type : 1.5mm ² - 2.5mm ²		

5	Earth Screw	Brass	1	Galvanizing chromating(Green)	
4	Terminal Screw	Brass	2		
3	Frame	Heat Resistance Steel	2		
2	Cover	Urea Resin	1	Molded	Red
1	Body	Urea Resin	1	Molded	Red
Sym	Item or Code No.	Material & Size	qt	Process	Remark
Catalog No. WNG15923-7R			Drawing Name Specification Drawing		
Name Full-Color 1-TOUCH Grounding duplex universal receptacle (Red)16A 250V ~			Drawing No.		
Remark			Scale: 1 : 1	Unit: mm	Date: Sep. 4. 2008
Drawn		Approved T. Kawamoto	MATSUSHITA ELECTRIC WORKS, LTD. WIRING DEVICES DIVISION.		
Designed S. Nishigaki		Manager Y. Ishigami			
Checked M. Hayafune					