


Radio frequency characteristic

Insertion (dB less)			VSWR (less)		
HF	FM VHF	UHF	HF	FM VHF	UHF
0.5	0.5	0.5	1.5	1.5	1.8

UF: 10MHz - 75MHz
 VHF: 76MHz - 222MHz
 UHF: 470MHz - 770MHz

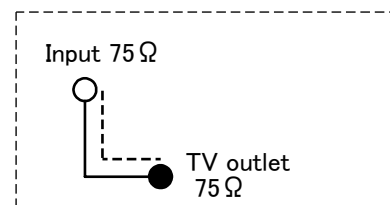

Circuit (The dotted line shows the current flow path)

Applicable plug	DIN (45325) applicable plug
Applicable cable	Radio frequency coaxial cable characteristic impedance 75Ω type 5C-2V, 3C-2V
No. of Cable	1 pce. (for input)

5	Terminal case	Polycarbonate	-	Transparent
4	Terminal screw	Mild steel	-	Zinc chromate
3	Holder	Cold rolled steel plate	-	Tin plating
2	Shielding plate	Cold rolled steel plate	-	Tin plating
1	5A0 Cover	PC-ABS	Black	
No.	Item or code No.	Material & Size	Color	Remark

Product No. : WXG2501B		Specification Drawing	
Product Name : X platform DIN Type Television Terminal (Black)			Unit : mm
			Rev.

Panasonic Manufacturing Ayuthaya Co.,Ltd.